




EN ISO 9001:2015
EN ISO 14001:2015
EN ISO 45001:2018

NON TOXIC, NON CORROSIVE, HEAVY METAL FREE

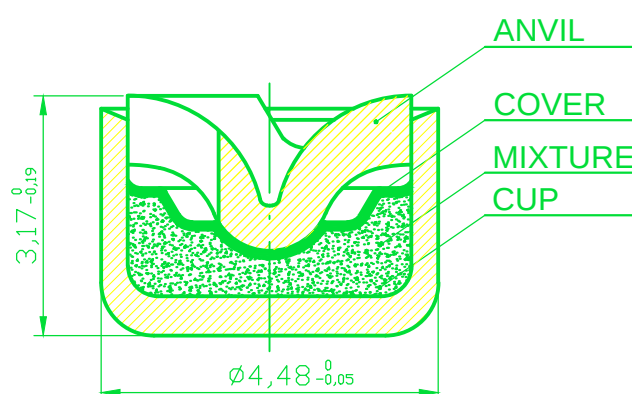

DESIGNED FOR USE IN:		
.222 REM; 223 REM; .22-250 REM; .243 WIN		
TECHNICAL CHARACTERISTICS		
Position	Material identification	Dimensions
Cup	CuZn30	0,50 ^{+0,02} ₀ mm
Anvil	CuZn30	0,91 ⁰ _{-0,03} mm
Cover	Paper	0,10 ⁰ _{-0,02} mm
Primer lacquers	Nitro lacquer capon, green	-
Mixture	Non toxic, non corrosive, heavy metal free	
SENSITIVITY		
Ball weight	55 g	
Upper statistical limit	$\bar{H} + 4S \leq 406,4\text{mm (16")}$	
Lower statistical limit	$\bar{H} - 2S \geq 76,2 \text{ mm (3")}$	
Firing pin	Ø2mm; R1,28mm	
Testing in cartridge case	8mm; .223 REM	
PACKING		
100pcs. of primers packed into a plastic tray with carton cover		
50 pcs. of plastic trays packed into a carton box		
10 carton boxes (50 000 pcs. of primers) packed into a special (carton or wooden) case		